

ILERGIR

Automatic pallet wrapper with turntable.

Production: Up to 30 pallets per hour



BENEFITS

THE ILERGIR AUTOMATIC WRAPPER OFFERS...

- Optimised use of film through electronic pre-stretch control
- Safety when handling the pallet
- A quick, easy film roll changing process
- Space savings in the plant
- Gentle, precise movements
- Complete pallet wrapping
- A load fully secured to the pallet
- Protection of the load against weather conditions

APLICACIONES

All types of palletised loads, in any industry.

TECHNICAL SPECIFICATIONS

POWER SUPPLY:

VOLTAGE: 380 III N+T 50 Hz





CONTROL VOLTAGE: 24V

POWER: 5.5 kW

PNEUMATIC SUPPLY:

PRESSURE: 6 bar

CONSUMPTION: 10 NL/min

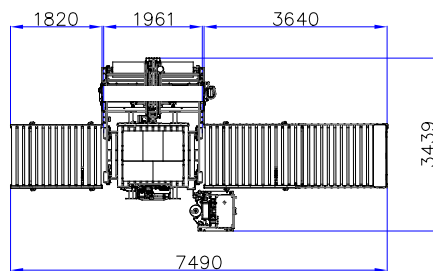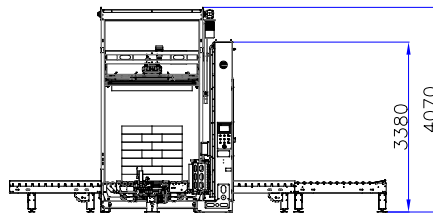

CHARACTERISTICS

- Production of up to 30 pallets per hour, depending on the pallet height, overlap and protection programme.
- No connection between the turntable and mast: both completely separate.
- Electronic pre-stretch adjustable through the screen. Continuous pre-stretch control, unlike gear-based systems.
- Continuous film tension control.
- Pneumatic tilting system to lift the film at the beginning of the wrapping process, thus eliminating the tail created by the excess film falling at the beginning of the cycle.
- Roll carriage with automatic film threading system.
- Double roping to finish off the stretch wrapping cycle.
- Double sealing system built into the turntable.
- Sealing against counterplate.
- 4 variable frequency drives to avoid sudden stopping and starting.
- Colour dialogue screen and control panel built into the main mast.

OPTIONS

- Top cover system with ILERTOP model PE film.
- Top plate to secure cardboard sheet.
- The size of the turntable can be adapted to every type of pallet.
- Anti-corrosion versions for corrosive products.
- ATEX versions for work in classified zones.